

UNIVERSITY OF EAST SARAJEVO FACULTY OF MECHANICAL ENGINEERING



6th INTERNATIONAL SCIENTIFIC CONFERENCE



"Conference on Mechanical Engineering Technologies and Applications"

PROCEEDINGS

17th-19th November East Sarajevo, RS, B&H



ZBORNIK RADOVA PROCEEDINGS

Istočno Sarajevo, BiH, RS 17 - 19. novembar 2022.

East Sarajevo, B&H, RS 17th – 19th November, 2022

ZBORNIK RADOVA SA 6. MEĐUNARODNE NAUČNE KONFERENCIJE "Primijenjene tehnologije u mašinskom inženjerstvu" COMETa2022, Istočno Sarajevo, 2022.

PROCEEDINGS OF THE 6th INTERNATIONAL SCIENTIFIC CONFERENCE "Conference on Mechanical Engineering Technologies and Applications" COMETa2022, East Sarajevo, 2022

Organizator:	Univerzitet u Istočnom Sarajevu Mašinski fakultet Istočno Sarajevo
Organization:	University of East Sarajevo Faculty of Mechanical Engineering East Sarajevo
Izdavač:	Univerzitet u Istočnom Sarajevu Mašinski fakultet Istočno Sarajevo
Publisher:	University of East Sarajevo Faculty of Mechanical Engineering East Sarajevo
Za izdavača: For publisher:	PhD Milija Kraišnik, associate professor
Urednici: Editors:	PhD Dušan Golubović, full professor PhD Miroslav Milutinović, associate professor PhD Saša Prodanović, associate professor
Tehnička obrada i dizajn: Technical treatment and desing:	PhD Aleksije Đurić, senior assistant MSc Jovana Blagojević, senior assistant MSc Milica Bošković, senior assistant Krsto Batinić, assistant
Izdanje: Printing:	Prvo 1 st
Register: Register:	ISBN 978-99976-947-6-8 COBISS.RS-ID 137162497

REVIEWERS

PhD Dušan Golubović, FME UES (B&H) PhD Dušan Gordić, FE Kragujevac (Serbia) PhD Ljubiša Dubonjić, FMCE Kraljevo (Serbia) PhD Mirko Blagojević, FE Kragujevac (Serbia) PhD Miroslav Stanojević, FME Belgrade (Serbia) PhD Adisa Vučina, FMEC Mostar (B&H) PhD Aleksandar Jovović, FME Belgrade (Serbia) PhD Aleksandar Košarac, FME UES (B&H) PhD Aleksandar Živković, FTS Novi Sad (Serbia) PhD Biljana Marković, FME UES (B&H) PhD Bogdan Marić, FME UES (B&H) PhD Branimir Krstić, University of Difence, Military Academy (Serbia) PhD Damjan Klobčar, FME Ljubljana (Slovenia) PhD Darko Bajić, FME Podgorica (MNE) PhD Dejan Jeremić, FME UES (B&H) PhD Dragan Milčić, FME Nis (Serbia) PhD Dragan Pršić, FMCE Kraljevo (Serbia) PhD Goran Orašanin, FME UES (B&H) PhD Jasmina Pekez, TF "Mihajlo Pupin" Zrenjanin (Serbia) PhD Jelena Jovanović, FME Podgorica (MNE) PhD Lozica Ivanović, FE Kragujevac (Serbia) PhD Milan Banić, FME Niš (Serbia) PhD Milan Rackov, FTS Novi Sad (Serbia) PhD Milan Tica, FME Banja Luka (B&H) PhD Milan Zeljković, FTS Novi Sad (Serbia) PhD Milija Kraišnik, FME UES (B&H) PhD Milomir Soja, FEE UES (B&H) PhD Miloš Milovančević, FME Nis (Serbia) PhD Miodrag Žigić, FTS Novi Sad (Serbia) PhD Mirko Dobrnjac, FME Banja Luka (B&H) PhD Miroslav Milutinović, FME UES (B&H) PhD Mladen Josijević, FE Kragujevac (Serbia) PhD Mladen Tomić, FTS Novi Sad (Serbia) PhD Mladomir Milutinović, FTS Novi Sad (Serbia) PhD Nebojša Radić, FME UES (B&H) PhD Nenad Grahovac, FTS Novi Sad (Serbia) PhD Nikola Tanasić, FME Belgrade (Serbia) PhD Nikola Vučetić, FME UES (B&H) PhD Ranka Gojković, FME UES (B&H) PhD Ranko Antunović, FME UES (B&H) PhD Saša Prodanović, FME UES (B&H) PhD Saša Živanović, FME Belgrade (Serbia) PhD Silva Lozančić, Faculty of Civil Engineering Osijek (Croatia) PhD Slaviša Moljević, FME UES (B&H) PhD Slobodan Lubura, FEE UES (B&H) PhD Slobodan Tabaković, FTS Novi Sad (Serbia) PhD Snežana Nestić, FE Kragujevac (Serbia) PhD Spasoje Trifković, FME UES (B&H) PhD Srđan Vasković, FME UES (B&H) PhD Stojan Simić, FME UES (B&H) PhD Uroš Karadžić, FME Podgorica (MNE)

PhD Vladimir Milovanović, FE Kragujevac (Serbia) PhD Vladimir Stojanović, FMCE Kraljevo (Serbia) PhD Vlado Medaković, FME UES (B&H) PhD Zdravko Pandur, FFWT UZ (Croatia)

INTERNATIONAL SCIENTIFIC COMMITTEE

PhD Dušan Golubović, FME UES (B&H) – president PhD Adisa Vučina, FMEC Mostar (B&H) PhD Aleksandar Aleksić, FE Kragujevac (Serbia) PhD Aleksandar Jovović, FME Belgrade (Serbia) PhD Aleksandar Košarac, FME UES (B&H) PhD Balasaheb M. Patre, SGGS IET (India) PhD Biljana Marković, FME UES (B&H) PhD Bogdan Marić, FME UES (B&H) PhD Borut Kosec, NTF Ljubljana, (Slovenia) PhD Božidar Rosić, FME Belgrade (Serbia) PhD Branimir Krstić, Military academy, University of Defence in Belgrade (Serbia) PhD Branko Vučijak, FME Sarajevo (B&H) PhD Bratislav Blagojević, FME Niš (Serbia) PhD Damjan Klobčar, FME Ljubljana (Slovenia) PhD Danijela Tadić, FE Kragujevac (Serbia) PhD Darko Knežević, FME Banja Luka (B&H) PhD Dejan Jeremić, FME UES (B&H) PhD Dragan Milčić, FME Niš (Serbia) PhD Dragan Spasić, FTS Novi Sad (Serbia) PhD George Nenes, UOWM (Greece) PhD Goran Janevski, FME Niš (Serbia) PhD Goran Orašanin, FME UES (B&H) PhD Goran Putnik, University of Minho, (Portugal) PhD Goran Šimunović, MEFSB (Croatia) PhD Indiran Thirunavukkarasu, Manipal Institute of Technology, Indija PhD Isak Karabegović, FTS Bihać (B&H) PhD Ivan Samardžić, MEFSB (Croatia) PhD Izet Bjelonja, FME Sarajevo (B&H) PhD Jozsef Nyers, The Obuda University Budapest (Hungary) PhD Kyros Yakinthos, AUTH, (Greece) PhD Lozica Ivanović, FE Kragujevac (Serbia) PhD Ljubodrag Tanović, FME Belgrade (Serbia) PhD Ljubomir Miladinović, FME Belgrade (Serbia) PhD Mathias Liewald, IFU, (Germany) PhD Milan Rackov, FTS Novi Sad (Serbia) PhD Milan Rakita, Purdue Univerzitet, SAD PhD Milan Tica, FME Banja Luka (B&H) PhD Milan Zeljković, FTS Novi Sad (Serbia) PhD Mile Savković, FMCE Kraljevo (Serbia) PhD Milorad Milovančević, FME Belgrade (Serbia) PhD Milosav Ognjanović, FME Belgrade (Serbia) PhD Mirko Blagojević, FE Kragujevac (Serbia) PhD Mirko Dobrnjac, FME Banja Luka (B&H) PhD Mirko Ficko, UM FPME, (Slovenia) PhD Miroslav Stanojević, FME Belgrade (Serbia)

PhD Miroslav Živković, FE Kragujevac (Serbia) PhD Mladen Tomić, FTS Novi Sad (Serbia) PhD Mladomir Milutinović, FTS Novi Sad (Serbia) PhD Nebojša Lukić, FE Kragujevac (Serbia) PhD Nebojša Radić, FME UES (B&H) PhD Nenad Pavlović, FME Niš (Serbia) PhD Nikola Vučetić, FME UES (B&H) PhD Nina Anđelić, FME Belgrade (Serbia) PhD Novak Nedić, FMCE Kraljevo (Serbia) PhD Obrad Spaić, UES PFM, (B&H) PhD Pavel Kovač, FTS Novi Sad (Serbia) PhD Ranislav Bulatović, FME Podgorica (MNE) PhD Radivoje Mitrović, FME Belgrade (Serbia) PhD Radoslav Tomović, FME Podgorica (MNE) PhD Radovan Radovanović, The Academy of criminalistic and police studies Belgrade (Serbia) PhD Ranko Antunović, FME UES (B&H) PhD Risto Ciconkov, FME Skopje (Macedonia) PhD Saša Ranđelović, FME Niš (Serbia) PhD Sergej Alexandrov, Institute for Problems in Mechanics (Russia) PhD Siniša Kuzmanović, FTS Novi Sad (Serbia) PhD Slaviša Moljević, FME UES (B&H) PhD Slavko Arsovski, FE Kragujevac (Serbia) PhD Snežana Nestić, FE Kragujevac (Serbia) PhD Spasoje Trifković, FME UES (B&H) PhD Srđan Vasković, FME UES (B&H) PhD Sreten Perić, Military academy, University of Defence in Belgrade (Serbia) PhD Stanislav Karapetrović, University of Alberta (Canada) PhD Stevan Stankovski, FTS Novi Sad (Serbia) PhD Stojan Simić, FME UES (B&H) PhD Strain Posavljak, FME Banja Luka (B&H) PhD Velimir Stefanović, FME Niš (Serbia) PhD Vencislav Grabulov, Institut IMS, Srbija PhD Vladimir Popović, FME Belgrade (Serbia) PhD Vlado Medaković, FME UES (B&H) PhD Vojislav Miltenović, FME Niš (Serbia) PhD Zdravko Krivokapić, FME Podgorica (MNE) PhD Zorana Tanasić, FME Banja Luka (B&H)

ORGANIZING COMMITTEE

PhD Milija Kraišnik, FME UES – president

PhD Miroslav Milutinović, FME UES PhD Saša Prodanović, FME UES PhD Nikola Vučetić, FME UES PhD Davor Milić, FME UES PhD Aleksije Đurić, FME UES Krsto Batinić, FME UES - Technical Secretary Milica Bošković, ma, FME UES - Technical Secretary Stanišić Vera – Secretary



TOOL GEOMETRY EFFECT ON MATERIAL FLOW AND MIXTURE IN FSW

Nada Ratković¹, Živana Jovanović Pešić², Dušan Arsić³, Miloš Pešić⁴, Dragan Džunić⁵

Abstract: FSW is a solid-state joining process. It is widely used for joining hard alloys like steel, titanium, and aluminum which are very difficult to join by fusion welding. FSW joint quality is mainly influenced by shoulder and pin geometry, its diameter, tool material, tool rotation speed, and linear traveling speed. The paper presents a brief overview of the tools used during the FSW procedure. The influence of the tool pin on the material flow and mixture was analyzed in detail. In addition, the primary and secondary material flow and how it is affected by the shape and dimensions of the tool pin are also discussed.

Key words: FSW, FSW tool, material flow

1 INTRODUCTION

Friction Stir Welding (FSW) also called "friction welding with a tool" is one of the advanced types of welding technology. Since it was patented (in 1991 at the TWI Institute, Cambridge) until today, this procedure has been developed and has reached a dynamic and wide field of application [1,2]. It is represented in the production processes of various industries: aviation, railway, military, automobile, etc. [3,4].

FSW process enables plate materials welding in all possible positions. It is also possible to join different materials [5]. It is particularly important that hard-to-weld materials, such as aluminum alloys, can be welded with high quality. It is possible to

¹ Nada Ratković, Associate Professor, Faculty of Engineering University of Kragujevac, Kragujevac, Serbia, nratkovic@ kg.ac.rs

² Živana Jovanović Pešić, Research Assistant, Faculty of Engineering University of Kragujevac, Kragujevac, Serbia, zixi90@gmail.com

³ Dušan Arsić, Assistant Professor, Faculty of Engineering University of Kragujevac, Kragujevac, Serbia, dusan.arsic@fink.rs

⁴ Miloš Pešić, Junior Research Assistant, Institute for Information Technologies University of Kragujevac, Kragujevac, Serbia, milospesic@uni.kg.ac.rs

⁵ Dragan Džunić, Assistant Professor, Faculty of Engineering University of Kragujevac, Kragujevac, Serbia, dzuna@kg.ac.rs

obtain a welded joint with excellent mechanical characteristics, which exceeds the strength of the base material (BM). At the beginning of the application of this procedure, only straight line connections were made, and later curvilinear ones, including circular ones.

The physical essence of the joint formation process itself is the same as in ordinary (conventional) friction welding. However, heat is not released by friction directly between the contact surfaces of the parts to be joined, but indirectly, using a special tool.

2 TOOL GEOMETRY

Tool geometry represents a very important and most influential parameter of the FSW process. The tool consists of two concentric parts: the supporting part and the working part. The tool is cylindrical in shape (Fig. 1). The supporting part is the body, and the working part is the pin of the tool. The pin has a smaller diameter and is usually conical in shape, and it can be threaded, grooved, and similar.




Fig.1 FSW tool [6]

The pin of the tool first comes into contact with the elements that need to be joined (plates). After that in welding plates keyhole is formed. The formation of the keyhole is achieved by penetrating through both welded elements until the tool shoulder achieves contact with the upper surface of the plates.

The shoulder of the tool needs to keep the material inside the welding zone. This can be enabled with a sufficiently large pressure from the tool shoulder on the front surfaces of welding plates. The tool shoulder can be with a flat or profiled surface of different configurations. The shape of the shoulder profile can be with scrolled, knurled, ridged, grooved, or a concentric circles (Fig. 2).




Fig. 2 Shapes of the tool shoulder profile for the FSW process can be: a. scrolled, b. knurled, c. ridged, d. grooved, e. concentric circles [7]

A featured shoulder advantage is due to better friction, which contributes to better generation and conduction of heat, as well as a better mixture of materials. The concave profile of the tool shoulder is designed to provide a "reservoir" of the material above the surface of the weld face, facilitate material flow around the tool and reduce plate thickness in the weld zone. In this way, a smooth and flat weld face is achieved thanks to the featured shoulder.

The shape of the tool pin and its dimensions, the length of the pin, the diameter, the tilt angle of the tool, the depth of immersion of the tool, the vertical force of the tool, the thickness of the weld plates, and a number of other factors affect the properties of the welded joint.

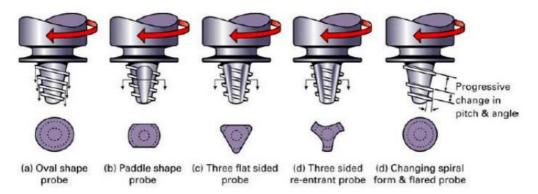


Fig. 3 Profiled tool pin shapes for FSW process [7]

The spirally profiled tool pin (Fig. 3) ensures good friction and material mixture, pushing it down so that a high-quality weld face is obtained, especially if the tool with three spiral flutes is used (Fig. 4).



Fig. 4 Tool for FSW process with three spiral flutes [6]

The pin profile of this tool is designed to reduce the weight of the tool and allow better material mixture. There are also tools with different geometrical pin shapes such as triangular, square, polygonal, and similar (Fig. 5).

Tool geometry effect on material flow and mixture in FSW

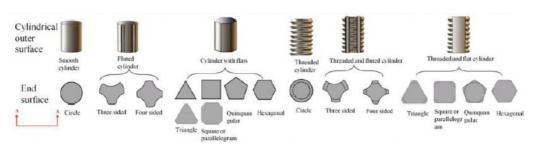


Fig. 5 Tools with different pin shapes [8]

For lap welding of aluminum alloy sheets, a multi-stage tool has been developed, the pin of which is a pentagonal profile (Figure 6) with reduced diameter, so that it achieves a good material mixture and does not reduce the thickness of the joint thanks to the concave profile of the tool shoulder.




Fig. 6 Schematic of the multi-stage tool for the FSW process [6]

Geometric adjustments are necessary for the FSW tool in order to make the welding process more efficient. The tool should be set to a small leading angle in relation to the workpiece normal (1° - 3°), thus the axis is slightly inclined in relation to the axis of the machine spindle (Fig. 7). Asymmetric position of the tool pin enables a better flow and mixture of the material.




Fig. 7 Schematic of the asymmetric tool for the FSW process [8]

3 MATERIAL FLOW AND MIXTURE DURING THE FSW PROCESS

The FSW process is characterized by three-dimensional material flow (translational, rotational, and vertical). By researching the process itself, it was determined that the material flow can be described by two components: primary and secondary.

Primary flow refers to the material flow around the tool pin. This flow is analogous to the laminar flow of liquid around a rotating cylinder (Fig. 8). The shape of the tool pin determines the stream flow, both in the longitudinal and the vertical direction. Fig. 9 shows a simplified schematic of the two-dimensional material flow around the tool pin during the FSW process.

The tool pin thread is designed to push the material vertically down toward the root of the weld, thereby causing a vertical component of material flow.

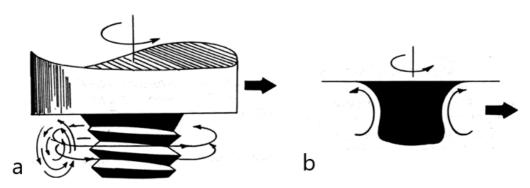


Fig.8 Scheme of material flow around the tool pin during the FSW process a - turbulent flow, b - laminar flow [6]

Additional vertical material flow occurs through the rotation of the tool shoulder. A part of the material immediately below the tool rotates around the top of the tool multiple times.




Fig.9 Schematic of the two-dimensional material flow around the tool pin during the FSW process [6]

Secondary material flow occurs when material that was previously located on the retreating side of the weld near the weld face flows and remains on the advancing side of the weld face. Secondary material flow is characteristic of thinner plates.

4 CONCLUSIONS

Given that FSW is a completely non-linear process, it is difficult to give a comprehensive, clear definition of material flow, because FSW does not allow geometric simplification due to its configuration. Geometric simplification is not possible because there is a complex three-dimensional flow and material mixture around the tip of the tool that is different on the advancing and retreating sides as well as in relation to the body of the tool. This points to the fact that there is neither a line nor a plane of symmetry to consider.

It is important to note that this represents a viscous-plastic material flow, created by the interaction of a solid body (tool) and a rigid base that supports the joint, and on the other side of the base material, which has basically elastic behavior. This means that there is a need for the so-called "hybrid" formulation that takes into account both phenomena, and is based on rigid body mechanics and fluid mechanics.

ACKNOWLEDGEMENT

This research is partly supported by the Ministry of Education and Science, Republic of Serbia, Grant 451-03-68/2022-14/ 200378, Grant III41007, and TR 35021.

REFERENCES

- [1] Thomas, W.M., Nicholas, E.D., Needham, J.C., Murch, M.G., Templesmith, P., Dawes, C.J. (1991), G.B. Patent Application No.9125978.8.
- [2] Dawes, C., Thomas W., (1995), TWI Bulletin 6, November/December, p. 124.
- [3] Thomas, W.M., Nicholas, E.D. (1997) Friction stir welding for the transportation industries. *Mater Des*, 18:269–73.
- [4] Heidarzadeh, A., Mironov, S., Kaibyshev, R., Çam, G., Simar, A., Gerlich, A., Khodabakhshi, F., Mostafaei, A., Field, D.P., Robson, J.D., et al. (2021) Friction Stir Welding/Processing of Metals and Alloys: A Comprehensive Review on Microstructural Evolution., *Progress in Materials Science*, 117, 100752, doi:10.1016/j.pmatsci.2020.100752.
- [5] Mishra, R.S., Ma Z.Y., (2005) Friction Stir Welding and Processing. *Materials Science and Engineering: R: Reports*, 50, 1–78, doi:10.1016/j.mser.2005.07. 001.
- [6] Ratković, N. (2009), Friction welding process of machine parts of different shapes and materials (in Serbian), PhD thesis, Faculty of Engineering, University of Kragujevac, Kragujevac.
- [7] Meilinger, Á., Török I., (2013), The importance of Friction Stir Welding, Tool, *Production Processes and Systems*, vol. 6. No. 1., pp. 25-34.
- [8] Zhang, Y.N., Cao, X., Larose, S., Wanjara, P. (2012) Review of Tools for Friction Stir Welding and Processing, *Canadian Metallurgical Quarterly*, 51, 250–261, doi:10.1179/1879139512Y.0000000015.